(54) Title: SYSTEM FOR OPTIMISING THE PRODUCTION PERFORMANCE OF A MILK PRODUCING ANIMAL HERD
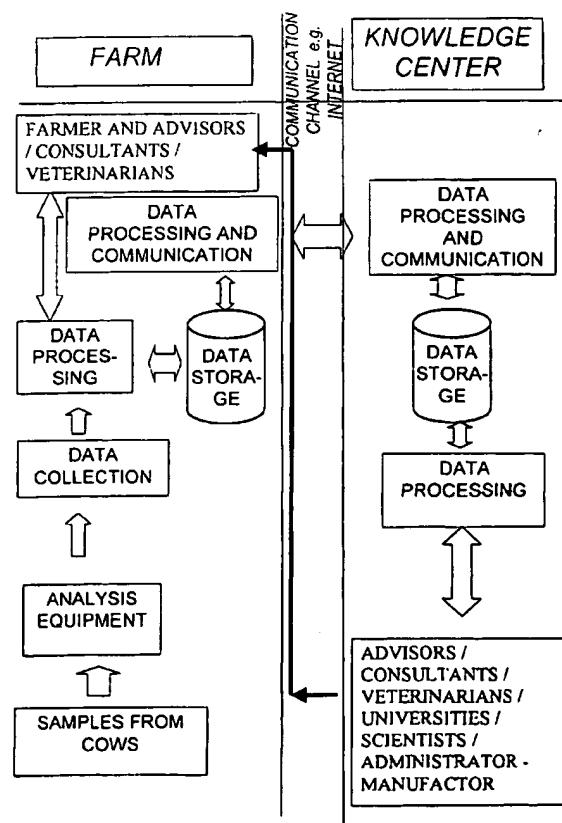
(57) Abstract: A system for optimising the production performance of a milk producing animal herd is provided. The system comprises milk sampling means, analytical means comprising separate means for analysing compounds or parameters that in the presence of compounds indicative of the physiological or nutritional condition of the herd member, generates detectable signals, and means for directing a part of the milk sample to each separate analysing means which is controlled by data for the physiological and nutritional state of a herd member such that the directing means is only activated at pre-selected points in time or at pre-selected time intervals in the production and or lactation cycles. Specific compounds are compounds indicative of mastitis, including beta-N-acetylhexosaminidase (NAGase) E.C. 3.2.1.52 and lactate dehydrogenase (LDH), protein balance, including milk urea nitrogen (MUN) and total protein, ketosis, including acetolactate, beta-hydroxybutyrate, acetone and lipids, fat and state in reproduction cycle, including a steroid or peptide hormone such as progesterone. Furthermore, the system comprises signal detection means for recording and processing the signals, means for data storage and data output means. Additionally these are provided methods for optimising the production performance of a milk producing animal herd and an apparatus thereof.

Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SYSTEM FOR OPTIMISING THE PRODUCTION PERFORMANCE OF A MILK PRODUCING
ANIMAL HERD

5 FIELD OF THE INVENTION

The present invention relates generally to a system and methods for optimising the pro-
duction performance of a milk producing animal herd. More specifically, it provides auto-
mated or semi-automated means for dynamic real time analyses of milk compounds and
10 parameters to provide quantitative analytical data that are indicative of the overall physio-
logical and nutritional state of the milking animals and which, if required, permit appropri-
ate corrective measures to be taken.

15 TECHNICAL BACKGROUND AND PRIOR ART

It is known to monitor the physiological and nutritional condition of milking animals, such
as cows. It is also known to collect data from individual milking animals, including data for
milk yield and composition, health condition data, feeding scheme data and breeding data
20 such as genetic data. A currently common procedure is to collect milk samples manually
from individual milking animals at regular intervals and subsequently ship the samples to a
central laboratory for chemical and biological analyses, thereby deriving information on the
milk quality as well as the health condition of each individual milking animal.

25 In most milk producing countries, dairy herd improvement associations (DHIAs) will col-
lect, evaluate and distribute such data relating to e.g. milk yield, milk quality and mastitis
(i.e. inflammation of the mammary gland). Based on these data that are available from the
DHIAs, the dairy farmers can select the best milking animals for breeding, make appropri-
ate adjustments to feeding schemes and control health to thereby optimise the milk pro-
30 duction.

However, this current procedure for collecting such data is cumbersome and it requires a
substantial amount of manpower as the milk samples are collected manually at the milk
production unit and shipped to central laboratories to be analysed. Consequently, milk
35 from each milking animal is typically only analysed 6-12 times per year. Using such a pro-
cedure it is not possible for the individual farm manager to take immediate corrective ac-
tions and e.g. implement feeding scheme adjustments or initiate prophylactic measures or
antibiotic treatments to control disease conditions.

2

This lack of access to updated information on significant production parameters involves several problems. As an example, the above procedure implies that milking cows may suffer from subclinical mastitis or other diseases for several weeks until detection hereof. An early detection of mastitis is highly desirable, as this condition has an important impact
5 on the overall dairy farm business economy. A further important herd management parameter is that of selecting the optimal point in time for insemination of animals in heat. This is presently done by visual inspection of animals, which evidently is a cumbersome and unreliable procedure. Accordingly, it is economically important for dairy farmers to have instantaneous access to updated data that are indicative of heat and pregnancy in
10 order to determine the optimal insemination time and control of pregnancy. Additionally, aberrant physiological conditions related to feeding such as ketosis, a metabolic disorder, and the overall metabolic balance of the milking animal, such as the protein balance in the rumen, are conditions for which there is a need to institute immediate corrective measures, which, however, is not possible unless up-to-date data that indicate the presence of
15 such conditions are available.

Therefore, a substantial need exists for automated or semi-automated systems and methods that can provide the dairy farmer with instant access to real time data indicating the immediate physiological and nutritional condition of individual milking animals as the basis
20 for taking instantaneous corrective actions to continuously improve the overall production performance of the milk producing herds including productivity of the milking animals, animal welfare and protection of the environment against pollution with animal waste, and with that the overall profitability of the dairy farm.

25 A review of research objectives for the development of monitoring and sensing systems for controlling the health of dairy cows has been given by Mottram (Livestock Production Science, 1997, **48**:209-217).

Several automated systems for monitoring selected compounds and parameters in milk
30 have been developed. Thus, US 5,873,323 discloses a method of milking animals automatically while determining whether the milking animal is diseased or in oestrus. Sensors are placed in the milking conduit system leading from the teat cups. The sensors measure simultaneously several parameters including milk flow, milk temperature and electric conductivity of the milk (mastitis detection). The data obtained by the measurements are pro-
35 vided to a computer which compares the new data with similar data from immediately preceding selected periods of time to identify aberrant values that indicate which animals are diseased or in oestrus.

US 5,743,209 discloses a system and method for monitoring and controlling milk produc-
tion at dairy farms that is capable of qualitative analysis of the composition of milk sam-
ples using IR/NIR optical probes. Compounds that are analysed simultaneously include fat,
protein, somatic cells (indicator for mastitis), casein, lactose and urea. EP 896 222 A3
5   discloses a system for monitoring and controlling protein utilisation in animals by auto-
matically analysing the urea content in milk using a sensor unit containing urease.
SE 9902972 discloses a method and a system for analysing milk during the milking op-
eration, including simultaneous analyses of somatic cells, "clots", salt ions and progeste-
rone. The analysing means are generally light emitter means and light detection means,
10 however, there is, in very general terms, referred to the use of a biosensor for measuring
i.a. progesterone, urea and ketone bodies.

The achievement of the highest possible productivity of a milk producing animal herd is an
extremely complicated task, as the productivity is highly dependent on a variety of factors
15 including: (i) optimal utilisation of feed rations which requires that feeding schemes are
designed on an individual animal basis or a group basis and is continuously adjusted
according to the milk yield (lactation state); (ii) tight control of subclinical and clinical
disease conditions that have an adverse effect on milk yield and composition; (iii) optimal
reproduction control including the selection of the most appropriate point in time for
20 insemination to avoid any reduction of overall milk yield due to deferment of new
pregnancy, and reliable detection of pregnancy.

Ideally, an automated or semi-automated system for optimising the production perfor-
mance of a milk producing animal herd should therefore have the capability to provide, on
25 a real time basis, quantitative measurements of a combination of compounds and pa-
rameters in milk samples from individual herd members or a group of herd members that
are indicative of all of (i) the health condition, (ii) the physiological condition, (iii) the
nutritional and energy state, (iv) the state in the oestrus cycle and (v) pregnancy.

30
From the above, it is evident that the overall production characteristics of an individual
herd member will vary considerably over time e.g. depending on its state in the lactation
cycle and the reproduction cycle which will e.g. have a significant impact on the feed re-
quirements and utilisation of that particular herd member. This variation implies that the
35 range of compounds and parameters that it is required to monitor at any given point in
time varies.

In addition to being capable of generating data for all relevant milk compounds and pa-
rameters that are required to fully optimise the production performance of a milk produc-

ing animal herd, the ideal automated or semi-automated system should be cost-effective. This implies that the individual analytical processes should be based on relatively cheap methods. As it is described in the following, a significant reduction in costs can be achieved by designing the production performance monitoring system such that an individual milk

5   sample collected at a given point in time is only analysed for compounds or parameters that need to be analysed at the particular point in time to optimise the production performance of the particular herd member or the particular group of herd members. Thus, to illustrate this point, compounds/parameters indicative of mastitis may be analysed on a daily basis whereas compounds/parameters that are indicative of whether or not an animal

10 is in heat need only be analysed at pre-selected periods of time.

Additionally, it is highly advantageous that the ideal production performance monitoring system is capable of generating quantitative analytical data for selected compounds and parameters, for which even relatively small day-to-day variations are highly predictive for

15 a change in the overall health condition, the physiological condition, nutritional and energy state, the state in the oestrus cycle or pregnancy of the individual herd member being tested. This requires that the system is provided with analytical means that permits frequent quantitative analyses to be made at a cost-effective level.

20 The present inventors have now developed a system for optimising the production performance of a milk producing animal herd, which meets all of the above requirements of an ideal system for optimising production performance of milk producing herds. The system is based on the findings that frequent and continuous real time measurements of one or more of a broad range of carefully selected compounds or parameters indicative of and

25 related to the physiological and nutritional condition of individual milking animals provide the means of continuously optimising the overall production performance of the milking animal herd and hence the profitability of the dairy farm.

In particular, it has been found that by combining parameters relating to mastitis, protein

30 balance, energy balance and state in oestrus cycle in a system according to the invention it has become possible to substantially improve the productivity and the profitability of dairy farms, as the combination of such parameters has been found to provide detailed and reliable information resulting in a substantially better picture of the overall physiological and nutritional condition of milking animals, such as e.g. metabolic disorders and re-

35 production state.

SUMMARY OF THE INVENTION

It is therefore a primary objective of the invention to provide the means to optimise the productivity and profitability of a milk producing animal herd, in particular a herd of dairy cows. The objective is met by providing a novel automated or semi-automated system that is capable of real time analysis of a broad range of compounds and parameters in

5   individual animal milk samples and to continuously process the thus obtained analytical data to provide, when required, the basis for taking immediate corrective steps to improve productivity of one or more herd members.

It is one significant feature of the system that the number of compounds or parameters

10   out of those possible that is to be analysed by the system at any given point in time is dependent e.g. on the reproduction or lactation cycle state of the individual animal. This is made possible by operationally linking the analytical means to a database containing information on the reproduction and lactation state of each herd member or any other information that may be used to determine whether or not a particular milk compound or

15   parameter should be analysed at a particular point in time. In this manner the system operates in a "dynamic" mode.

Accordingly, the invention pertains in one aspect to an automated or semi-automated system for optimising the production performance of a milk producing animal herd com-

20   prising a plurality of individual herd members each assigned a unique identification code that is recognisable by the system, the system comprising the following interconnected means:

(a) means for collecting a milk sample from an individual member of said herd, said means

25   is connectable to the herd milking system,

(b) means for recognising the identification code of the individual herd member,

(c) means for storing data including data for the physiological and nutritional state of said

30   each individual herd member including data indicating point in time in the reproduction and lactation cycles,

(d) means for analysing a plurality of compounds or parameters in a milk sample being collected, said means comprising:

35

       (i) separate means for analysing individual compounds or parameters in the milk sample, each of said separate means is capable of generating a detectable signal in the presence of an individual milk compound or parameter,

(ii) means for directing a part of the milk sample to each separate analysing means, said directing means being controlled by said means for storing data for the physiological and nutritional state of each individual herd member such that the directing means is only activated at pre-selected points in time or at pre-selected time intervals in the reproduction or lactation cycles,

(iii) means for detecting signals generated in the presence of a compound or parameter being analysed,

(e) means for converting the detected signals to a set of data that is indicative of the physiological and/or nutritional condition of said individual herd member,

(f) means for storage of said set of data descriptive of the physiological and/or nutritional condition for said individual herd members, and

(e) data output means.

In a further aspect there is provided a method for optimising the production performance of a milk producing animal herd using the system as defined above. The method comprises the steps of:

(i) collecting at a milking site a milk sample from each individual member of the herd,

(ii) contacting said sample with the analysing means that, in the presence of at least one compound or parameter indicative of the physiological and/or nutritional condition of the herd member, generates a detectable signal/detectable signals,

(iii) recording in the signal detection means the character of said signal(s) to provide a set of analytical data indicative of the presence and/or amount of said compound or parameter,

(iv) having the generated data processed to provide a set of data descriptive of the physiological and/or nutritional condition of the individual herd member, and

(v) taking, on the basis of the set of data provided, appropriate steps to improve or correct the physiological and/or nutritional condition of any of the herd members in need of such improvement or correction.

In yet a further aspect the invention relates to a method for optimising the production per-
formance of a milk producing animal herd comprising a plurality of individual herd mem-
bers using an automated or semi-automated system for optimising the production per-
formance of a milk producing animal herd, the system comprising the following intercon-
5   nected means:

(a) means for collecting a milk sample from an individual member of said herd, said means
is connectable to the herd milking system,

10 (b) means for recognising a unique identification code assigned to each of the individual
herd member,

(c) means for storing data including data for the physiological and nutritional state of said
each individual herd member including data indicating point in time in the reproduction
15 and lactation cycles,

(d) means for analysing a plurality of compounds or parameters in a milk sample being
collected, said plurality of compounds or parameters at least including a compound or pa-
rameter indicative of mastitis, a compound indicative of the reproduction cycle state, at
20 least one compound indicative of the protein balance of the herd member and at least one
compound indicative of the energy balance state of the herd member, said analysing
means comprising

        (i) separate means for analysing individual compounds or parameters in the milk
25   sample, each of said separate means is capable of generating a detectable signal in
        the presence of an individual milk compound or parameter, and

        (ii) means for detecting signals generated in the presence of a compound or pa-
        rameter being analysed,
30
(e) means for converting the detected signals to a set of data that is indicative of the
physiological and/or nutritional condition of said individual herd member,

(f) means for storage of said set of data descriptive of the physiological and/or nutritional
35 condition for said individual herd members, and

(e) data output means,

the method comprising the steps of:

(i) collecting at a milking site a milk sample from each individual member of the herd,

(ii) contacting said sample with the analysing means that, in the presence of at least one
5 compound or parameter indicative of the physiological and/or nutritional condition of the
herd member, generates a detectable signal/detectable signals,

(iii) recording in the signal detection means the character of said signal(s) to provide a set
of analytical data indicative of the presence and/or amount of said compound or parame-
10 ter,

(iv) having the generated data processed to provide a set of data descriptive of the
physiological and/or nutritional condition of the individual herd member, and

15 (v) taking, on the basis of the set of data provided, appropriate steps to improve or correct
the physiological and/or nutritional condition of any of the herd members in need of such
improvement or correction.

In a further aspect the invention provides an apparatus for analysing a plurality of com-
20 pounds or parameters in a milk sample of an individual member of a milk producing animal
herd, said apparatus comprising:

(i) separate means for analysing individual compounds or parameters in the milk
sample, each of said separate means is capable of generating a detectable signal in
25   the presence of an individual sample compound or parameter,

(ii) means for directing a part of the milk sample to each separate analysing
means, said directing means being controlled by means for storing data for the
physiological and nutritional state of each individual herd member, including data
30   indicating point in time in the reproduction and lactation cycles of said herd mem-
ber, such that the directing means is only activated at pre-selected points in time
or at pre-selected time intervals in the production or lactation cycles of the indivi-
dual herd member.

35

DETAILED DISCLOSURE OF THE INVENTION

The primary objective of the invention is to provide an automated or semi-automated
system for optimising the production performance of a milk producing animal herd.

As used herein, the term "automated" implies that the system can be operated substan-
tially without manual operations. Thus, the term indicates that milk samples are automati-
cally collected on-line at the milking site from the milking system and automatically trans-
ported to analytical means which in turn automatically generate analytical data that are
5   processed automatically to update the system and to provide instructions to the farm
management for corrective measures. The milking site may a milking site of an automatic
milking system for freely moving milking animal or one of several milking sites in a
conventional milking system such as a herringbone milking system. The milking site may
also be at rotating or parallel milking parlours.
10

The term "semi-automated" as used herein refers to a system where at least part of the
operations of the system involves some manual operation, e.g. manual transport of sam-
ples to the analytical means.

15   The term "production performance" as used herein, is intended to mean the production
performance in its broadest aspect. Thus, included in this term is milk production, inclu-
ding milk quantity and quality, reproductive performance of herd members, e.g. the num-
ber of offspring per milking animal and optimum utilisation of feed rations. Although the
system is particularly useful in dairy cow herds, the term "milk producing animal herd" is
20   intended to mean any herd comprising milk producing animals including e.g. sheep, goats,
camels and buffaloes.

It is an advantageous feature of the present system that it is capable of recognising unique
identification codes carried by the herd members, such as e.g. bar codes, e.g. involving an
25   alpha-numeric code, or other electronic signal types generated by electronic devices such
as radio transmitters, assigned to each individual member of the herd.

The system of the invention comprises several operationally interconnected elements
which may or may not be physically connected. As one such element, the system of the
30   invention comprises means for collecting at a milking site milk samples from individual
members of a milking animal herd. Typically, the sample collecting means is the physical
connection between the milking points and the analysing means. The function of the sam-
ple collecting means is to collect milk samples to be analysed at the appropriate time
during the milking process and to subsequently transport and present the samples to the
35   analysing means. However, in both automated and semi-automated systems it is con-
ceivable that the sample collecting means is not in direct physical connection with the
analysing means, but the system may be designed so as to deliver a sample being col-
lected to a separate means for storing milk samples, which in turn can be operationally
connected to the analysing means as it will be explained in the following.

In useful embodiments, the sample collecting means is adapted to collect a milk sample from an individual mammary gland of a herd member or alternatively, to collect a sample combining milk from two or more mammary glands of the herd member including a sample
5   where milk from all mammary glands is combined.

In a presently preferred embodiment, the sample collecting means is capable of collecting a proportional milk sample which is representative of the average composition of the total milk produced during the milking of each individual animal. Such a proportional sample can
10 be collected by leading a proportion of an area of the milk flow to a sample storage container or by leading all the milk in a flow to a sample storage container for a pre-selected time interval of the milking operation, or by a combination of these principles. The former principle implies the advantage that it is not required to provide the sampling means with moving parts such as magnetic valves. The sample collecting means may
15 comprise means for storing a milk sample being collected.

Suitable means for that purpose include a container, which is connected to the general milking system line, optionally by pressure control means permitting that the pressure in the container can be different from that of the milking system. With such a design the
20 pressure in the container is the same as that of the milking system when the milk sample is being collected, but when a subsample of the total sample should be generated for analysis, the container is subjected to a pressure that exceeds the pressure of the milking system. The sample storage means can be positioned at any location which permits the subsequent and/or parallel transport of subsamples to the analysing means to occur such
25 as e.g. at the milking site.

When a milk sample is stored in the storage means, a certain separation of milk components such as fat may occur. As it is critical that subsamples that are to be contacted with the analysing means has the natural composition it may be appropriate to provide the
30 means for storing a milk sample with means for continuously mixing, homogenising or agitating the milk sample during storage. One example of such means is a magnetic stirring device.

It is generally required to design the sample storage means such that it can be flushed or
35 cleaned in between samples. Suitable flushing or cleaning media include milk, air, water, detergent solutions or combinations thereof. During storage of a sample, it may be appropriate to add a buffer solution or a dilute solution to the sample. Additionally, it may be advantageous to provide the sample storage means with temperature control means. Accordingly, in useful embodiments, the sample collecting means further comprises or is

operationally connected with at least one of (i) means permitting the sample collecting means to be cleaned between samples, (ii) means for storing a buffer solution or a dilute solution, (iii) means for connecting the means for storing a milk sample to the analytical means, the means for storing a buffer solution or a dilute solution, the milking system
5   and/or a sample discharge outlet, (iv) means for controlling the temperature of the milk sample being collected and (v) means for transporting the milk sample being collected. Additionally, the means for collecting a milk sample may comprise means for apportioning a milk subsample to the analysing means. The general function of such means is to divide the total sample collected during the milking operation into one or more subsamples which
10 is/are transported to the analysing means and the remaining part of the sample which may be led to the milk bulk tank or discharged.

In one particular embodiment the sample collecting means comprises means for simultaneously storing a plurality of milk samples, i.e. milk samples from several individual ani-
15 mals. Such means may e.g. be in the form of a device having several separate compartments or containers for receiving individual samples. In one specific embodiment, such a device comprising a plurality of milk storage compartments or containers is a device that can be inserted into and engaged with the milk collecting means prior to collecting milk samples and is removable herefrom when the plurality of samples is collected for bringing
20 it into operational contact with the analytical means.

The interfacing between sample collecting means and the milking system may be at any suitable points of the milking system. Thus, as suitable examples the interfacing elements may be connected to teat cups, teat tubes, milk metering devices, milk flow metering de-
25 vices, milk containers and any milk transporting tubing elements. The nature of the interfacing will depend on the material at the site of connection as it will be readily appreciated by the skilled artisan. In one specific embodiment, the means for collecting a milk sample is connected to a tubing element of the milking system and is provided with a separate milk metering device. When the system of the invention is designed so as to permit sam-
30 pling from individual mammary glands, the interfacing is preferably at individual teat cups or teat tubes.

A major objective of the invention is, as it is mentioned above, to provide a system that provides the means to optimise the production performance of a milk producing animal
35 herd. A key element in the system is to provide for real time "dynamic" analysis of a range of compounds and parameters to generate analytical data that, when assessed separately or in combination and, optionally compared with previous data for the compounds or parameters, enable the herd manager to take appropriate corrective actions. The compounds and parameters to be analysed are selected so as to provide for each herd member a

comprehensive description of the health condition, physiological condition, energy and nutritional condition and state in reproduction cycle

Accordingly, the system comprises in a preferred embodiment separate means for ana-
5 lysing individual compounds or parameters in the milk sample that include means for analysing at least one compound or parameter selected from the group consisting of a compound or parameter that is indicative of mastitis, a compound or parameter that is indicative of the reproduction cycle state of the milking animal and a compound or parameter that is indicative of the energy and nutritional state of the milking animal.
10

In the present context the term "mastitis" is to be understood as an inflammatory reaction of the mammary gland. Mastitis is the most loss-making production disease in the dairy industry. Thus, annual losses from mastitis in the USA amounts to more than 2 billion dollars. Decreased milk production, discarded milk, reduced raw milk quality, medical costs
15 and higher culling rates are the most important economic consequences of both subclinical and clinical mastitis. However, public health, product quality and shelf life, animal care, and consumer perception provide additional economic incentives to control mastitis. Mastitis is positively correlated to milk yield and despite much effort little improvement in reduction of incidence of mastitis, if any, has occurred during the last couple of decades.
20 Thus, it is of major importance for the dairy farmer to have an early, or more preferably, an instant indication of mastitis, including subclinical mastitis, in order to minimise the production losses.

Mastitis is often characterised by the cause of the disease which may be infectious, trau-
25 matic or toxic. When mastitis occurs, the intramammary tissue is damaged, followed by an increased permeability between the blood and milk compartments, resulting in changes in milk composition. Subclinical mastitis can only be detected by laboratory tests whereas clinical mastitis can be detected by clinical examination of the milk and/or the udder. The pathogens most often found in connection with mastitis are bacteria such as e.g. *Escher-*
30 *ichia coli*, *Staphylococcus aureus*, *Micrococcus* spp., *Streptococcus uberis*, *Streptococcus agalactiae* and *Streptococcus dysgalactiae*.

Several compounds that are not present in milk from healthy mammary glands and/or the amounts of which are elevated in mastitic milk are indicative of mastitis. Such compounds
35 include somatic cells, enzymes, proteins, fat, lipids, minerals and trace elements. Accordingly, analysis of milk for any such compounds including as examples fatty acids, whey proteins, κ-casein, immunoglobulins, proteose peptones, serum albumin, lactoferrin, and mineral compounds such as sodium, chloride, iron and copper may be useful in the present invention. Enzymes may be particularly suitable as compounds indicative of mastitis. Re-

presentative examples of such enzymes include catalase, lactate dehydrogenase (LDH), alkaline phosphatase, acid phosphatase, carboxylesterase, arylesterase, β-glucuronidase, lactoperoxidase, lipase, lysozyme, xanthine oxidase, plasmin and beta-N-acetylhexosaminidase (NAGase).

5

Accordingly, in one useful embodiment the system of the invention comprises separate analysing means for analysing a compound or parameter indicative of mastitis that is selected from the group consisting of somatic cells, microbial cells or parts thereof, an enzyme, a protein, a fat, a lipid, a mineral, a trace element, milk temperature, conductivity
10 of the milk, a particle that is separable by filtration and any combination thereof.

An example of a specific compound the amount of which is indicative of mastitis is beta-N-acetylhexosaminidase (NAGase), an intracellular, lysosomal enzyme (E.C. 3.2.1.52), belonging to a group of glycosidases. NAGase is involved in glycoprotein catabolism and is
15 present in plasma. The concentration of NAGase in plasma is typically 11 to 20 times of that found in normal milk and two to four times that of mastitic milk. The function of NAGase in mammary secretions is presently not known. In one embodiment, the system of the invention comprises separate analysing means for analysing NAGase that is capable of detecting an amount of NAGase which is in the range of 0 to 0.1 U/ml including 0.01 to
20 0.09 such as 0.02 to 0.08, e.g. 0.03 to 0.05 U/ml.

In the present context, a further enzyme of interest as an indicator of mastitis is lactate dehydrogenase (LDH) that is also normally present in plasma at substantially higher levels than in milk and the amount of which is therefore increased in milk from inflamed
25 mammary glands. In a further embodiment, the present system comprises separate analysing means for analysing LDH that is capable of detecting an amount of LDH in milk which is in the range 100 to 2000 U/ml such as the range of 200 to 1500 U/ml. e.g. the range of 500 to 1000 U/ml.

30 In order to optimise the overall production performance of a milk producing animal herd, it is pertinent to closely monitor the state in reproduction cycle of each individual animal in order to select the optimum time for insemination, i.e. to determine the optimum reception time in the cycle. However, it is difficult to visually observe and closely monitor, on an individual herd member basis, a large herd. It is particularly difficult to identify the first heat
35 event after calving and lactation start in cows at the time interval between 40 and 65 days post calving. Therefore, automatic methods permitting reliable and frequent monitoring of the state in reproduction cycle are needed.

"State in reproduction cycle" is used herein to designate the different periods in the sexual cycle of female mammals during which they are in pro-oestrus, oestrus (in heat), di-oestrus and pregnancy, respectively. Compounds which, in accordance with the invention, may be applied to indicate reproduction cycle state may include hormones such as steroid

5   or peptide hormones including as an example, the steroid hormone, progesterone that is produced by the corpus luteum in the ovaries and the placenta in all mammals.

Accordingly, in one preferred embodiment the system of the invention comprises separate analysing means for analysing a compound or parameter such as a hormone, the presence

10   or amount of which in milk is indicative of the reproduction cycle state of the milking animal that is selected from the group consisting of a compound that indicates pro-oestrus, a compound that is indicative of oestrus (heat), a compound that indicates di-oestrus and a compound that indicates pregnancy. In this context, one presently preferred hormone is progesterone. In useful embodiments, the separate analysing means for analysing

15   progesterone is capable of detecting an amount hereof in the milk sample which is in the range of 0 to 30 ng/ml, including 0 to 20 ng/ml, such as 1 to 15 ng/ml or 2 to 10 ng/ml.

The feeding of milking animals is a factor of the utmost importance in optimising the pro-duction performance of the animals. A general problem in current dairy farming is that the

20   individual milking animals are not continuously fed optimally. Thus, high yielding milking animals are as a matter of convenience frequently offered the same feed ration as low yielding milking animals. It is also a problem that the milk yield of the same individual herd member varies according to its state in the lactation cycle for which reason the nutrient requirements of the herd member is constantly changing. One important aspect in

25   relation to the composition of the feed for milking animals is that the crude protein content of the feed should be continuously optimised in order to improve the overall crude protein balance of the milking animal. In the present context the term "protein balance" is used to designate the ratio between the amount of protein which is taken up by the milking animal and used for milk and tissue production, and the amount of urea excreted from the milking

30   animal.

It is known to use the content of urea in milk as an indication of the protein balance of a milking animal, i.e. as an indicator of the milking animal's utilisation of feed ration nitrogen. The urea concentration in the blood of milking animals varies and is affected e.g.

35   by protein intake and urinary excretion. If the milking animal consumes feed with a content of crude protein that is too high for complete microbial conversion in the gastrointestinal tract, e.g. in the rumen of the milking animal, this will result in higher blood urea levels. As blood urea is freely diffusable into milk, changes in blood urea levels

will cause a corresponding change in milk urea level normally denoted milk urea nitrogen (MUN).

Accordingly, milk urea nitrogen (MUN) can be used in accordance with the invention as an
5 indicator e.g. for optimising a feeding scheme and/or for pointing out possibilities for
changing the composition of the feed. Thus, regular MUN measurements can be applied to
precisely and instantaneously adjusting the nitrogen requirements of each individual
milking animal. Additionally, MUN measurements can aid the dairy farmer in e.g. reducing
feed costs, to increase the overall milk protein yield, and to minimise nitrogen excretion
10 into the environment.

In one useful embodiment the system of the invention therefore comprises separate ana-
lysing means for analysing a compound or parameter indicative of the energy and/or nu-
tritional state of the milking animal which is a compound or parameter that is indicative of
15 the protein balance of the milking animal including milk urea nitrogen (MUN) and total milk
protein. It has been found that a combination of MUN and total milk protein values are
particularly useful as an indication of protein balance. In useful embodiments, the system
comprises separate analysing means for analysing a compound or parameter that is in-
dicative of the protein balance of the milking animal which is capable of detecting an
20 amount of MUN which is in the range of 0 to 1000 mg/l including 0 to 700 mg/l such as 10
to 500 mg/ml or 100 to 400 mg/ml.

As it is discussed above, the metabolic performance of the milking animal is particularly
relevant for the overall production performance of each individual milking animal, and
25 hence the entire herd. Ketosis is a metabolic disorder affecting the metabolic performance
which is frequently encountered in dairy animals such as cows, in particular during certain
periods of the lactation cycle. The primary cause of ketosis is a lack of available energy for
the mammary gland in early lactation resulting in an aberrant energy balance of the
animal. When milking animals are affected by this metabolic disorder, they typically lose
30 weight and produce less milk. Immediate feed ration adjustment is needed to prevent and
treat the disorder. The disorder is characterised by elevated levels of ketone bodies in the
tissues and body fluids, including blood, milk and urine. In the present context "ketone
bodies" includes compounds such as acetolactate, beta-hydroxybutyrate (BOHB) and
acetone.
35
Accordingly, in one useful embodiment the system of the present invention comprises
separate analysing means for analysing a compound or parameter that is indicative of the
overall energy balance of the milking animal including a ketone body compound and the

total milk fat content. In specific embodiments, the ketone body compound is selected from the group consisting of acetolactate, beta-hydroxybutyrate (BOHB) and acetone. In presently preferred embodiments, such analysing means is capable of detecting an amount of BOHB in milk which is in the range of 0 to 0.7 mM including an amount hereof

5 which is the range of 0.1 to 0.5 mM such as e.g. in the range of 0.2 to 0.4 mM.

As it discussed above, it is one useful characteristic of the system of the invention that a range of compounds and parameters that, for each individual herd member provides a comprehensive picture of all of (i) the health condition, (ii) the physiological condition, (iii)

10 the nutritional and energy state, (iv) the state in the oestrus cycle and (v) pregnancy can be analysed. Accordingly, in preferred embodiments the system of the invention comprises separate means for analysing at least one compound or parameter selected from the group consisting of NAGase, lactate dehydrogenase (LDH), progesterone, milk urea nitrogen, total protein content, BOHB, total fat content and milk yield. In certain embodiments, the

15 system comprises analysing means for at least the following compounds/parameters: (i) an enzyme that is indicative of mastitis such as NAGase or LDH, a hormone compound indicative of state in the reproductive cycle such as progesterone, a compound indicative of protein balance such as MUN and/or total protein content and a compound indicative of the energy state such as acetone, a ketone body or BOHB.

20

In addition to these compounds and parameters, the system may comprise or may be linked to means for analysing any other compound or parameter that may be present or occur in milk samples such as e.g. somatic cells, filtratable clots/particles, pathogenic and saprophytic microorganisms including coliform bacteria, psychrotrophic bacteria or parts

25 thereof such as fat, proteins, lipopolysaccharides, conductivity, added water, carbohydrates, immunoglobulins, enzymes such as e.g. lactoperoxidase, lactoferrin, whey proteins, caseins, amino acids, fatty acids and residues of drugs including antibiotics.

As also discussed above, it is one advantageous feature of the invention that the pa-
30 rameters/compounds can be analysed in a dynamic mode, i.e. that only those compounds or parameters which, at a given point in time of the reproduction and/or lactation cycle of the individual herd members should be analysed in a particular milk sample. This is achieved by providing in the system means for storing data including data for the physiological and nutritional state of said each individual herd member including data indicating

35 point in time in the reproduction and lactation cycles and by connecting such means operationally with means for analysing a plurality of compounds or parameters in a milk sample being collected, comprising: (i) separate means for analysing individual compounds or parameters in the milk sample, each of said separate means is capable of generating a detectable signal in the presence of an individual milk compound or parameter, (ii) means

for directing a part or a subsample of the milk sample to each separate analysing means, said directing means being controlled by the above means for storing data for the physiological and nutritional state of each individual herd member such that the directing means is only activated at pre-selected points in time or at pre-selected time intervals in

5 the production or lactation cycles. In this connection, one interesting feature is that the means for storing data for the physiological and nutritional state of each individual herd member is continuously updated with new data, so that the selection of the range of compounds/parameters that are analysed in a given sample at a given point in time is based on a constantly updated set of data for the particular herd member.

10

As illustrative examples, it may be appropriate to analyse about 20 samples for heat/pregnancy annually, e.g. 5 times per week in periods of expected oestrus and sam- ples about 3 weeks post-oestrus and about 20 samples for detection of anoestrus. Analy- ses for compounds/parameters that are indicative of mastitis may be carried out at each

15 milking or once every day. With respect to analyses for protein balance indicators, a suit- able frequency may be once a week and may only be carried out for a proportion of the herd members e.g. at least 10%, 20% or 30% of the herd members throughout the lacta- tion period. Compounds that are indicators for the energy state of the animals such as BOHB, acetone or total fat content may e.g. be analysed once daily in the first two months

20 of post-calving.

The analysing means of the system may be selected from any analytical means known in the art for analysing any of the above compounds/parameters. Illustrative examples of such analysing means includes enzyme based assays, immunologically based assays,

25 biosensors, biochemical assays, spectrometric assays, wet chemistry assays, sequential injection analysis and flow injection analysis assays which are suitable for analysing the presence of the compounds or parameters. Preferably, the analysing means are designed to perform quantitative measurements. In one useful embodiment the analysing means comprises solid support analytical means or devices which e.g. may be in the form of test

30 strips (also known as dry sticks) comprising appropriate reagent(s) that in the presence of the compound being analysed generate(s) a detectable signal. Additionally, the analysing means may comprise or may be operationally linked to means for storing and transporting such solid support analytical devices.

35 Additionally, the system of the present invention comprises means for detecting signals generated by the analytical means in the presence of a compound or parameter being analysed. Such signals may e.g. be in the form of intensity, frequency, colour, number etc. Any conventional means for detecting such analytical signals are encompassed by the present invention.

It is contemplated that the means for analysing a plurality of compounds or parameters in a milk sample may be analytically linked, i.e. physically connected to a single means for collecting a milk sample as described above, but it is also conceivable that the analysing

5   means is analytically linked to a plurality of such milk sample collecting means, which e.g. may be located at the milking site(s), i.e. the analysing means and the milk collecting means may be spatially separated. When the analysing means is linked to a plurality of sample collecting means, the thus collected milk samples are suitably transported to the analysing means via a tube element, via a conveyer element or by hand. In any of these

10 ways of transportation, the individual milk samples may be collected and transported in appropriate enclosure elements such as e.g. bags of flexible polymeric material, containers of plastic, glass or metal or any other suitable sample container,

In a further useful embodiment, the system according to the invention has means for

15 analysing a plurality of compounds or parameters placed at each milking site.

Furthermore, the system of the invention comprises means for processing the obtained signals to thereby convert these signals to a set of data which is indicative of the physio-logical and/or nutritional condition of the individual herd member. The means for signal

20 processing are preferably in the form of a computer program which is executable on a computer system including an embedded software and designed to translate and to process the obtained signals and to carry out analysis of the obtained data in order to reveal physiological conditions such as mastitis, protein balance, ketosis and state in reproduction cycle.

25

Such analysis can be carried out in many ways, e.g. by comparing with previous data from the particular milking animal, and/or calculated mean values based on similar data from the specific herd, and/or from recent and/or previously obtained data from the specific milking animal.

30

In accordance with the invention the system comprises means for data storage of the ob-tained set of data which is descriptive of the physiological and/or nutritional condition of the individual herd member. For permanent storage of data, magnetic and optical media such as tapes, disks, flash, and CD-ROMs may be applied. Accordingly, the analytical mea-

35 surement data for each milking animal are kept in the data storage allowing for analysis of periodical changes, and allowing data for specific milking animals to be compared as well as allowing for comparisons of data from different milking animals in order to provide a better identification of any abnormality or deviation from the baseline or the normal range. Furthermore, the system comprises data output means for delivering or presenting the

obtained and processed data to the user, typically by print, visual and/or auditive means
including telephones such as mobile telephones. Transmission of data to the user may be
via the internet.

5   For the purpose of data analysis, the system according to the invention may comprise an
internal database and/or an external database having multiple data relating to previous
analyses of milk samples for the presence of compounds or parameters which are indica-
tive of the physiological and/or nutritional condition of milk producing animal herd mem-
bers. It will be appreciated, that in order to support these databases, software such as
10   database management systems (DBMS) is required to handle the storage and retrieval of
data, and in order to provide the user with commands to query and update the database.
Examples of such database management systems include hierarchical and relational da-
tabase management systems. The database management systems is preferably stored on
a memory device and is executable for query on a computer system. Access to the
15   management systems is conveniently via the internet.

In an advantageous embodiment the multiple data stored in the internal database and/or
the external database are data selected from (i) the location of the milking site, (ii) data
for time and frequency of sample collection, (iii) data identifying the individual herd
20   members from which samples were collected, (iv) analytical data indicative of the
physiological and/or nutritional condition of the herd member, and (v) historical data for
the individual herd member. In one advantageous embodiment the external database
comprises data descriptive of the physiological and/or nutritional condition collected from
similar individual members of one or more corresponding milk producing animal herd(s).
25

Thus, it is contemplated that when a plurality of data obtained from individual herds are
transmitted to and stored in the external database, this external or central database will,
after a period of time, contain a substantial amount of organised data for many milking
animals from many areas. Statistical processing of this large number of data is expected to
30   allow for continuos improvements of early diagnosis of abnormal physiological and/or
nutritional condition of milking animals such as cows. A significant advantage hereof is that
such external and central databases will contain data from a large number of animals from
a particular district or region, e.g. a whole country or even the whole world. The large
number of data will provide a basis for extensive statistical processing of the data in order
35   to reveal new information. As a special advantage any indications of the occurrence of
epidemic illnesses among e.g. cows is expected to be easier to reveal and recognise. It is
contemplated that the communication to and from the external or central database may be
via the internet.

It will be appreciated that the internal and external databases may comprise further data and information. Such additional data and information may be data representing diagnostic parameters, physiological parameters, physiological knowledge and data representing advises and recommendations relating to actions to be taken regarding specific results
5 from the analysis.

In one aspect, the database management system is capable of comparing real time ana-lytical data received from the signal detection means with data stored in the internal data-base and/or an external database and, based thereupon, transmitting an instruction mes-
10 sage. Such an instruction message can e.g. be a message indicating that a specific herd member or group of herd members is ready for insemination, indicating that a specific herd member is in need for mastitis treatment or indicating that a specific herd member or group of herd members is in need for feeding scheme adjustment. The recipient of the instruction message may e.g. be a specified specialist such as a farmer, a veterinarian, an
15 inseminator and a farm management consultant.

In a further embodiment the instruction message may be sent from the system, e.g. as a digital signal, to the milking system, such as an automatic milking system. Thus, it will be possible to divert milk of low quality, such as mastitic milk, from the ordinary high quality
20 milk. Additionally, it is contemplated that the system according to the invention may com-prise means, including "smart gates", adapted to receive an instruction message and as response hereto direct selected animals to selected sites so as to allow for the above mentioned treatments or actions.

25 In accordance with the above description, useful embodiments of the system of the inven-tion comprises data storage means comprises a database containing for each individual herd member multiple data related to previous analyses of milk samples from herd mem-bers for the presence of individual compounds or parameters including data for identifying the milking site, milk yield data, data to identify the individual herd members, data related
30 to parity, reproduction state and lactation state of the herd members including data indi-cating points in time in the reproduction and lactation cycles, data for time of sample col-lections, historical analytical data for the physiological and nutritional state, historical data for compositions of milk samples, feeding scheme data, disease record data including data for previous disease treatments.
35
In yet another embodiment the data storage means of the present system is, or is opera-tionally linked to, a data management system that is capable of comparing real time ana-lytical data received from the signal detection means with data stored in the data storage means and, based thereupon, generating and transmitting an instruction message to the

herd manager or any other recipient such as a veterinarian, an inseminator or a farm
management consultant. Such an instruction message may e.g. indicate that a specific
herd member or group of herd members is ready for insemination, that a specific herd
member is in need of mastitis treatment and/or that at least one specific herd member or
5   group of herd members is in need of a feeding scheme adjustment.

In a still further embodiment, the data storage means of the system is operably linked to a
database comprising historical data descriptive of the physiological and nutritional condi-
tion collected from members of one or more different milk producing animal herds, said
10 database either being part of the system or being an external database operationally
linked to the system, e.g. via the internet.

In a further aspect, the invention pertains to a method for optimising the production per-
formance of a milk producing animal herd using the system as described above, the
15 method comprising the steps of: (i) collecting at a milking site a milk sample from each
individual member of the herd, (ii) contacting said sample with the analysing means of the
present system that, in the presence of at least one compound or parameter indicative of
the physiological and/or nutritional condition of the herd member, generates a detectable
signal/detectable signals, (iii) recording in the signal detection means the character of said
20 signal(s) to provide a set of analytical data indicative of the presence and/or amount of
said compound or parameter, (iv) having the generated data processed to provide a set of
data descriptive of the physiological and/or nutritional condition of the individual herd
member, and (v) taking, on the basis of the set of data provided, appropriate steps to im-
prove or correct the physiological and/or nutritional condition of any of the herd members
25 in need of such improvement or correction.

As mentioned above, the invention provides in a still further aspect a method for optimis-
ing the production performance of a milk producing animal herd comprising a plurality of
individual herd members using an automated or semi-automated system for optimising the
30 production performance of a milk producing animal herd, the system comprising the
following interconnected means: (a) means for collecting a milk sample from an individual
member of said herd, said means is connectable to the herd milking system, (b) means for
recognising a unique identification code assigned to each of the individual herd member,
(c) means for storing data including data for the physiological and nutritional state of said
35 each individual herd member including data indicating point in time in the reproduction
and lactation cycles, (d) means for analysing a plurality of compounds or parameters in a
milk sample being collected, said plurality of compounds or parameters at least including a
compound or parameter indicative of mastitis, a compound indicative of the reproduction
cycle state, at least one compound indicative of the protein balance of the herd member

and at least one compound indicative of the energy balance state of the herd member, said analysing means comprising (i) separate means for analysing individual compounds or parameters in the milk sample, each of said separate means is capable of generating a detectable signal in the presence of an individual milk compound or parameter, and (ii)

5   means for detecting signals generated in the presence of a compound or parameter being analysed, (e) means for converting the detected signals to a set of data that is indicative of the physiological and/or nutritional condition of said individual herd member, (f) means for storage of said set of data descriptive of the physiological and/or nutritional condition for said individual herd members, and (e) data output means.

10

This method comprises the steps of: (i) collecting at a milking site a milk sample from each individual member of the herd, (ii) contacting said sample with the analysing means that, in the presence of at least one compound or parameter indicative of the physiological and/or nutritional condition of the herd member, generates a detectable signal/detectable

15   signals, (iii) recording in the signal detection means the character of said signal(s) to provide a set of analytical data indicative of the presence and/or amount of said compound or parameter, (iv) having the generated data processed to provide a set of data descriptive of the physiological and/or nutritional condition of the individual herd member, and (v) taking, on the basis of the set of data provided, appropriate steps to improve or correct

20   the physiological and/or nutritional condition of any of the herd members in need of such improvement or correction. In this method, all parameters, features and procedures are otherwise as described above for the system of the invention.

As also described above, the present invention relates in another aspect to an apparatus

25   for analysing a plurality of compounds or parameters in a milk sample of an individual member of a milk producing animal herd.

The apparatus of the invention is useful in the system and the methods of the invention and it comprises: (i) separate means for analysing individual compounds or parameters in

30   the milk sample, each of said separate means is capable of generating a detectable signal in the presence of an individual sample compound or parameter, (ii) means for directing a part of the milk sample to each separate analysing means, said directing means being controlled by means for storing data for the physiological and nutritional state of each individual herd member, including data indicating point in time in the reproduction and lac-

35   tation cycles of said herd member, such that the directing means is only activated at preselected points in time or at pre-selected time intervals in the production or lactation cycles of the individual herd member, all of which features are as described above for the system and the methods of the invention.

In useful embodiments the apparatus further comprises means for detecting signals generated in the presence of a compound or parameter being analysed and such an apparatus provided with means for connecting it with at least one of: (a) means for collecting a milk sample from an individual member of said herd, said means is connectable to the

5   herd milking system, (b) means for recognising an identification code of the individual herd member, (c) means for storing data including data for the physiological and nutritional state of said each individual herd member including data indicating point in time in the reproduction and lactation cycles, (d) means for converting the detected signals to a set of data that is indicative of the physiological and/or nutritional condition of said individual

10   herd member, (e) means for storage of said set of data descriptive of the physiological and/or nutritional condition for said individual herd members, and (f) data output means, which are all as described hereinbefore.

The invention will be further illustrated by means of the following non-limiting examples

15   and the drawings wherein:

Fig. 1 shows an example of the system arranged at a milking site,

Fig. 2 shows an embodiment of a data handling system for collecting, storing and pro-

20   cessing data,

Fig. 3 shows a plurality of farmers coupled to a central system,

Fig. 4 shows one exemplary embodiment of analysing means according to the invention,

25   and   .

Fig. 5 shows a second exemplary embodiment of analysing means according to the invention.

30

EXAMPLE 1

Analysing equipment means arranged at a milking site

35   As an example, Fig. 1 shows the analysing equipment for analysing compounds indicative of the physiological condition of the milking animals arranged at a milking site in connection with sample collecting means. As can be seen from the figure, the sample collecting means is the physical connection between the milking points and the analysing equipment.

The function of the sample collecting means is to collect milk samples to be analysed at an appropriate time during the milking process.

The milking site may be part of an automatic milking system for freely moving cows, car-
5 rying identification means, such as earmarks, or strips which may be electronically de-
tected. In a further embodiment the milking site is one of several milking sites in a her-
ringbone milking system. In the broadest aspect of this invention other kinds of milking
sites may be applied, e.g., rotating or parallel parlours. As can also be seen from Fig. 1,
the analysing means may be combined with existing milking control system performing
10 supplementary measurements such as milk volume, milk flow and temperature measure-
ments.

At the milking site the identification of the cow is read and stored electronically. One or
more samples are extracted from the milk flow. Sample(s) may extracted from at least one
15 - preferably specifically identified - quarter (or mammary gland) of the udder. An advanta-
geous alternative may be to extract samples from at least two quarters of one udder in
order to compare the measurements on samples from the at least two quarters.

20 EXAMPLE 2

Data handling system for collecting, storing and processing data

Figure 2 illustrates one embodiment of the present invention. As can be seen from the ex-
25 ample in Fig. 2, the system consists of a data system comprising a local arrangement at
the farm including milk sample collecting means, analysing means, data collection and
processing, data storage, and further processing and transmission. As can be seen from
Fig. 2, the processed data may be transmitted via a communication channel, such as the
internet, to external databases. In the present example the transmitted data are received
30 and stored in an external database at a knowledge centre, such as e.g. DHIA (National
Dairy Herd Improvement Association), a scientific centre or a university. The knowledge
centre is accessible to a plurality of advisors, consultants, veterinarians, scientists etc. As
can be seen from Fig. 2 the knowledge database is accessible to advisors, consultants etc.
through the internet. As is further illustrated on Fig. 3, the data in the external database at
35 the knowledge centre may be collected from a number of farms.

EXAMPLE 3

Chemical analysis equipment

5   As mentioned above, various appropriate chemical analysis equipment or analysing means
    may be applied in order to perform the chemical analysis of the compounds indicative of
    the physiological condition of the milk producing animal.

    Fig. 4 illustrates one example of such suitable chemical analysis equipment adapted to
10 carry out the invention. Test strips or dry sticks 1 adapted to indicate the presence or
    amount of one or more of the desired compounds are stored in separate cartridges 2
    holding the test strips. A test strip 3 is released from the cartridge to a conveyor belt 4.
    The conveyor belt advances the test strip towards a peristaltic pump 5. The inlet of peri-
    staltic pump 6 is connected with the milk pipe line receiving milk from the milking equip-
15 ment. As indicated in Fig. 4, the peristaltic pump 5 withdraws a small sample from the
    milk pipe line or the milk sample storage means, thereby transferring of few drops to the
    test strip 7. A chemical reaction takes place and the test strip is analysed by a detector or
    test reader 8, such as a CCD camera or other photometry equipment, having a signal
    output port connected to a data collecting and processing device.
20
    Fig. 5 illustrates another embodiment of analysing means adapted to carry out the inven-
    tion. Again, test strips or dry sticks 1 adapted to indicate the presence or amount of one or
    more of the desired compounds are arranged on a carrier tape 2 covered by a sealing tape
    3. The tape is arranged on a spool 4. The sealing tape 3 is removed by rewinding on a
25 second spool 5 shortly before the stick is exposed to the milk sample. A fast loop 6 ex-
    tracts a fraction of the milk from the milk line. A valve 7 opens for a short time interval to
    release a few drops of milk onto a test strip 1. A funnel 8 located beneath the tape is ar-
    ranged to receive the excess milk as waste. The tape is moved forward whereby the test
    strips 1 after having received a few drops of milk are exposed to the detector 9 and sub-
30 sequently reminded on the spool 10. The detector can be a CCD camera or other pho-
    tometry equipment having a signal output port connected to a data collecting and pro-
    cessing device. In a presently preferred embodiment the test strips or sticks on the tape
    are arranged to comprise at least 4 sensing areas: Acetone or BOHB (beta-hydroxyl-bu-
    tyrate), progesterone, Nagase (beta-N-acetylhexosaminidase) or lactate dehydrogenase
35 (LDH) and urea (milk urea nitrogen). It is however also contemplated to apply a tape ha-
    ving only one or two different sensing areas, such as sensing areas for the two most often
    applied compounds for indicating the physiological condition of the milk producing animal.
    Such compounds are e.g. compounds indicating mastitis and milk urea nitrogen.

CLAIMS

1. An automated or semi-automated system for optimising the production performance of
5 a milk producing animal herd comprising a plurality of individual herd members each as-
signed a unique identification code that is recognisable by the system, the system com-
prising the following interconnected means:

(a) means for collecting a milk sample from an individual member of said herd, said means
10 is connectable to the herd milking system,

(b) means for recognising the identification code of the individual herd member,

(c) means for storing data including data for the physiological and nutritional state of said
15 each individual herd member including data indicating point in time in the reproduction
and lactation cycles,

(d) means for analysing a plurality of compounds or parameters in a milk sample being
collected, said means comprising:
20

(i) separate means for analysing individual compounds or parameters in the milk
sample, each of said separate means is capable of generating a detectable signal in
the presence of an individual milk compound or parameter,

25   (ii) means for directing a part of the milk sample to each separate analysing
means, said directing means being controlled by said means for storing data for the
physiological and nutritional state of each individual herd member such that the
directing means is only activated at pre-selected points in time or at pre-selected
time intervals in the reproduction or lactation cycles,
30

(iii) means for detecting signals generated in the presence of a compound or pa-
rameter being analysed,

(e) means for converting the detected signals to a set of data that is indicative of the
35 physiological and/or nutritional condition of said individual herd member,

(f) means for storage of said set of data descriptive of the physiological and/or nutritional
condition for said individual herd members, and

(e) data output means.

2. A system according to claim 1 where the sample collecting means is adapted to collect a milk sample from an individual mammary gland of a herd member.

5

3. A system according to claim 1 where the sample collecting means is adapted to collect a sample combining milk from two or more mammary glands of a herd member.

4. A system according to claim 2 or 3 where the sample collecting means is capable of
10   collecting a proportional milk sample.

5. A system according to any of claims 2-4 where the sample collecting means is capable of collecting a subsample during a pre-selected time interval of the milking operation.

15   6. A system according to claim 1 where the sample collecting means comprises means for storing a milk sample being collected.

7. A system according to claim 6 where the means for storing a milk sample comprises mixing means.

20

8. A system according to any of claims 1-7 where the sample collecting means further comprises or is operationally connected with at least one of (i) means permitting the sample collecting means to be cleaned between samples, (ii) means for storing a buffer solution or a dilute solution, (iii) means for connecting the means for storing a milk sample to
25   the analytical means, the means for storing a buffer solution or the dilute solution, the milking system and/or a sample discharge outlet, (iv) means for controlling the temperature of the milk sample being collected and (v) means for transporting the milk sample being collected.

30   9. A system according to any of claims 1-8 where the sample collecting means comprises means for storing a plurality of milk samples.

10. A system according to claim 9 where the means for storing a plurality of milk samples is in the form of a device comprising a plurality of milk storage containers.

35

11. A system according to claim 10 where the device comprising a plurality of milk storage containers is insertable into the milk collecting means prior to collecting milk samples and is removable herefrom when the plurality of samples is collected for bringing it into operational contact with the analytical means.

12. A system according to any of claims 6-11 where the means for storing a milk sample has a pressure that is different from the pressure of the milking system to which said means is connected.

13. A system according to any of claims1-12 where the means for collecting a milk sample is connected to an element of the milking system selected from the group consisting of a teat cup, a teat tube, a milk metering device and a milk transporting tube.

14. A system according to claim 13 where the means for collecting a milk sample is connected to a tubing element of the milking system, said means is optionally provided with a separate milk metering device.

15. A system according to claim 1 where the separate means for analysing individual compounds or parameters in the milk sample includes means for analysing at least one compound or parameter selected from the group consisting of a compound or parameter that is indicative of mastitis, a compound or parameter that is indicative of the reproduction cycle state of the milking animal and a compound or parameter that is indicative of the energy and nutritional state of the milking animal.

16. A system according to claim 15 comprising separate analysing means for analysing a compound or parameter indicative of mastitis that is selected from the group consisting of somatic cells, microbial cells or parts thereof, an enzyme, a protein, a lipid, a mineral, a trace element, milk temperature, conductivity of the milk and a particle that is separable by filtration.

17. A system according to claim 16 where the compound indicative of mastitis is an enzyme, the amount of which is increased in milk from an inflamed mammary gland.

18. A system according to claim 17 where the enzyme is selected from the group consisting of lactate dehydrogenase (LDH) and beta-N-acetylglucosaminidase (NAGase) E.C. 3.2.1.52.

19. A system according to claim 18 where the separate analysing means for analysing NAGase is capable of detecting an amount of NAGase which is in the range of 0 to 0.1 U/ml and/or an amount of LDH which is in the range of 100 to 2000 U/ml.

20. A system according to claim 15 comprising separate analysing means for analysing a compound or parameter, the presence or amount of which in milk is indicative of the re-

production cycle state of the milking animal that is selected from the group consisting of a
compound that indicates pro-oestrus, a compound that is indicative of oestrus (heat), a
compound that indicates di-oestrus and a compound that indicates pregnancy.

5   21. A system according to claim 20 where the compound indicative of the reproduction
cycle state of the milking animal is a hormone.

22. A system according to claim 21 where the hormone to be analysed is progesterone.

10   23. A system according to claim 22 where the separate analysing means for analysing
progesterone is capable of detecting an amount hereof in the milk sample which is in the
range of 0 to 30 ng/ml, including 0 to 20 ng/ml.

24. A system according to claim 15 comprising separate analysing means for analysing a
15   compound or parameter indicative of the energy and/or nutritional state of the milking
animal that is selected from the group consisting of a compound or parameter that is in-
dicative of the protein balance of the milking animal and a compound or parameter that is
indicative of the overall energy balance of the milking animal.

20   25. A system according to claim 24 where the compound or parameter that is indicative of
the protein balance of the milking animal is selected from the group consisting of milk urea
nitrogen (MUN) and total milk protein.

26. A system according to claim 25 where the separate analysing means for analysing a
25   compound or parameter that is indicative of the protein balance of the milking animal is
capable of detecting an amount of MUN which is in the range of 0 to 1000 mg/l including 0
to 700 mg/l.

27. A system according to claim 24 where the compound or parameter that is indicative of
30   the overall energy balance of the milking animal is selected from the group consisting of a
ketone body compound and total milk fat content.

28. A system according to claim 27 where the ketone body compound is selected from the
group consisting of acetolactate, beta-hydroxybutyrate (BOHB) and acetone.
35
29. A system according to claim 28 where the analysing means for analysing a compound
or parameter that is indicative of the overall energy balance of the milking animal is capa-
ble of detecting an amount of BOHB which is in the range of 0 to 0.7 mM.

30. A system according to claim 1 where the separate means for analysing an individual compound or parameter in the milk sample include means for analysing at least one compound selected from the group consisting of NAGase, progesterone, milk urea nitrogen, total protein content, BOHB, total fat content and milk yield.

5

31. A system according to any of claims 1-30 where the means for analysing a plurality of compounds or parameters in a milk sample is analytically linked to a plurality of means for collecting a milk sample.

10 32. A system according to claim 31 where milk samples collected by the plurality of means for collecting a milk sample is transported to the means for analysing a plurality of compounds or parameters in a milk sample via a tube element, via a conveyer element or by hand.

15 33. A system according to claim 31 where the means for analysing a plurality of compounds or parameters in a milk sample is spatially separated form the plurality of means for collecting a milk sample.

34. A system according to claims 32 or 33 where each individual milk sample is collected in 20 an enclosure element.

35. A system according to any of claims 1-30 where means for analysing a plurality of compounds or parameters is placed at each milking site.

25 36. A system according to claim 1 where the data storage means comprises a database containing for each individual herd member multiple data related to previous analyses of milk samples from herd members for the presence of individual compounds or parameters.

37. A system according to claim 36 where the multiple data include data selected from the 30 group consisting of data for identifying the milking site, milk yield data, data to identify the individual herd members, data related to parity, reproduction state and lactation state of the herd members including data indicating points in time in the reproduction and lactation cycles, data for time of sample collections, historical analytical data for the physiological and nutritional state, historical data for compositions of milk samples, feeding scheme 35 data, disease record data including data for previous disease treatments.

38. A system according to claim 36 where the data storage means is, or is operationally linked to, a data management system that is capable of comparing real time analytical data received from the signal detection means with data stored in the data storage means

and, based thereupon, generating and transmitting an instruction message to the herd manager.

39. A system according to claim 1 or 38 where the data storage means is operably linked to a database comprising historical data descriptive of the physiological and nutritional condition collected from members of one or more different milk producing animal herds, said database either being part of the system or being an external database operationally linked to the system.

40. A system according to claim 39 where the external database is operationally linked to the system via the internet.

41. A system according to claim 38 where the instruction message indicates that a specific herd member is ready for insemination.

42. A system according to claim 38 where the instruction message indicates that a specific herd member is in need of mastitis treatment.

43. A system according to claim 38 where the instruction message indicates that at least one specific herd member is in need of a feeding scheme adjustment.

44. A system according to claim 38 where the recipient of the instruction message is a pre-selected specialist including a farmer, a veterinarian, an inseminator or a farm management consultant.

45. A system according to claim 1 where the analysing means comprises means for performing an analysis selected from the group consisting of an enzymatically based assay, an immunologically based assay, a biosensor analysis, a biochemical assay, a spectrometric assay and a flow injection based assay.

46. A system according to claim 45 where the analysing means comprises solid support analytical devices.

47. A system according to claim 46 where the analysing means comprises or is operationally linked to means for storing and transporting the solid support analytical devices.

48. A method for optimising the production performance of a milk producing animal herd using the system according to any claims 1-47, the method comprising the steps of:

(i) collecting at a milking site a milk sample from each individual member of the herd,

(ii) contacting said sample with the analysing means that, in the presence of at least one compound or parameter indicative of the physiological and/or nutritional condition of the
5 herd member, generates a detectable signal/detectable signals,

(iii) recording in the signal detection means the character of said signal(s) to provide a set of analytical data indicative of the presence and/or amount of said compound or parameter,

10

(iv) having the generated data processed to provide a set of data descriptive of the physiological and/or nutritional condition of the individual herd member, and

(v) taking, on the basis of the set of data provided, appropriate steps to improve or correct
15 the physiological and/or nutritional condition of any of the herd members in need of such improvement or correction.

49. A method for optimising the production performance of a milk producing animal herd comprising a plurality of individual herd members using an automated or semi-automated
20 system for optimising the production performance of a milk producing animal herd, the system comprising the following interconnected means:

(a) means for collecting a milk sample from an individual member of said herd, said means is connectable to the herd milking system,

25

(b) means for recognising a unique identification code assigned to each of the individual herd member,

(c) means for storing data including data for the physiological and nutritional state of said
30 each individual herd member including data indicating point in time in the reproduction and lactation cycles,

(d) means for analysing a plurality of compounds or parameters in a milk sample being collected, said plurality of compounds or parameters at least including a compound or pa-
35 rameter indicative of mastitis, a compound indicative of the reproduction cycle state, at least one compound indicative of the protein balance of the herd member and at least one compound indicative of the energy balance state of the herd member, said analysing means comprising

(i) separate means for analysing individual compounds or parameters in the milk sample, each of said separate means is capable of generating a detectable signal in the presence of an individual milk compound or parameter, and

5   (ii) means for detecting signals generated in the presence of a compound or parameter being analysed,

(e) means for converting the detected signals to a set of data that is indicative of the physiological and/or nutritional condition of said individual herd member,

10

(f) means for storage of said set of data descriptive of the physiological and/or nutritional condition for said individual herd members, and

(e) data output means,

15

the method comprising the steps of:

(i) collecting at a milking site a milk sample from each individual member of the herd,

20 (ii) contacting said sample with the analysing means that, in the presence of at least one compound or parameter indicative of the physiological and/or nutritional condition of the herd member, generates a detectable signal/detectable signals,

(iii) recording in the signal detection means the character of said signal(s) to provide a set 25 of analytical data indicative of the presence and/or amount of said compound or parameter,

(iv) having the generated data processed to provide a set of data descriptive of the physiological and/or nutritional condition of the individual herd member, and

30

(v) taking, on the basis of the set of data provided, appropriate steps to improve or correct the physiological and/or nutritional condition of any of the herd members in need of such improvement or correction.

35 50. A method according to claim 49 using a system where the sample collecting means is adapted to collect a milk sample from an individual mammary gland of a herd member.

51. A method according to claim 49 using a system where the sample collecting means is adapted to collect a sample combining milk from at least two mammary glands of a herd member.

5   52. A method according to claim 50 or 51 using a system where the sample collecting means is capable of collecting a proportional milk sample.

53. A method according to any of claims 50-52 using a system where the sample collecting means is capable of collecting a subsample during a pre-selected time interval of the
10   milking operation.

54. A method according to claim 49 using a system where the sample collecting means comprises means for storing a milk sample being collected.

15   55. A method according to claim 54 using a system where the means for storing a milk sample comprises mixing means.

56. A method according to any of claims 49-55 using a system where the sample collecting means further comprises, or is operationally connected with, at least one of (i) means
20   permitting the sample collecting means to be cleaned between samples, (ii) means for storing a buffer solution or a dilute solution, (iii) means for connecting the means for storing a milk sample to the analytical means, the means for storing a buffer solution or the dilute solution, the milking system and/or a sample discharge outlet, (iv) means for controlling the temperature of the milk sample being collected and (v) means for
25   transporting the milk sample being collected.

57. A method according to any of claims 49-56 using a system where the sample collecting means comprises means for storing a plurality of milk samples.

30   58. A method according to claim 57 using a system where the means for storing a plurality of milk samples is in the form of a device comprising a plurality of milk storage containers.

59. A method according to claim 58 using a system where the device comprising a plurality of milk storage containers is inserted into the milk collecting means prior to collecting milk
35   samples and is removed herefrom when the plurality of samples is collected for bringing it into operational contact with the analytical means.

60. A method according to any of claims 54-59 using a system where the means for storing a milk sample has a pressure that is different from the pressure of the milking system to which said means is connected.

5   61. A method according to any of claims 49-60 using a system where the means for collecting a milk sample is connected to an element of the milking system selected from the group consisting of a teat cup, a teat tube a milk flow metering device, and a milk transporting tube.

10 62. A system according to claim 61 where the means for collecting a milk sample is connected to a tubing element of the milking system and is provided with a separate milk flow meter.

63. A method according to claim 49 where the compound indicative of mastitis is an en-
15 zyme, the amount of which is increased in milk from an inflamed mammary gland.

64. A method according to claim 63 where the enzyme is selected from the group consisting of lactate dehydrogenase (LDH) and beta-N-acetylglucosaminidase (NAGase) E.C. 3.2.1.52.
20

65. A method according to claim 64 using a system where the analysing means for analysing NAGase is capable of detecting an amount of NAGase which is in the range of 0 to 0.1 U/ml and/or an amount of LDH which is in the range of 100 to 2000 U/ml.

25 66. method according to claim 49 using a system comprising separate analysing means for analysing a compound or parameter, the presence or amount of which in milk is indicative of the reproduction cycle state of the milking animal that is selected from the group consisting of a compound that indicates pro-oestrus, a compound that is indicative of oestrus (heat), a compound that indicates di-oestrus and a compound that indicates
30 pregnancy.

67. A method according to claim 66 where the compound indicative of the reproduction cycle state of the milking animal is a hormone.

35 68. A method according to claim 67 where the hormone to be analysed is progesterone.

69. A method according to claim 68 using a system comprising analysing means for analysing progesterone that is capable of detecting an amount hereof in the milk sample which is in the range of 0 to 30 ng/ml including 0 to 20 ng/ml.

70. A method according to claim 49 using a system where the compound or parameter that is indicative of the protein balance of the milking animal is selected from the group consisting of milk urea nitrogen (MUN) and total milk protein.

5

71. A method according to claim 70 using a system where the analysing means for analysing a compound or parameter that is indicative of the protein balance of the milking animal is capable of detecting an amount of MUN which is in the range of 0 to 1000 mg/l including 0 to 700 mg/l.

10

72. A method according to claim 49 where the compound or parameter that is indicative of the overall energy balance of the milking animal is selected from the group consisting of a ketone body compound and total milk fat content.

15 73. A method according to claim 72 where the ketone body compound is selected from the group consisting of acetolactate, beta-hydroxybutyrate (BOHB) and acetone.

74. A method according to claim 73 using a system where the analysing means for analysing a compound or parameter that is indicative of the overall energy balance of the

20 milking animal is capable of detecting an amount of BOHB which is in the range of 0 to 0.7 mM including 0.1 to 0.7 mM.

75. A method according to any of claims 49-74 using a system where the means for analysing a plurality of compounds or parameters in a milk sample is analytically linked to a

25 plurality of means for collecting a milk sample.

76. A method according to claim 75 where milk samples collected by the plurality of means for collecting a milk sample is transported to the means for analysing a plurality of compounds or parameters in a milk sample via a tube element, via a conveyer element or

30 by hand.

77. A system according to claims 75 or 76 where each individual milk sample is collected in an enclosure element.

35 78. A method according to claim 75 where the means for analysing a plurality of compounds or parameters in a milk sample is spatially separated form the plurality of means for collecting a milk sample.

79. A method according to claim 49 using a system where the data storage means comprises a database containing for each individual herd member multiple data related to previous analyses of milk samples from herd members for the presence of individual compounds or parameters.

5

80. A method according to claim 79 where the multiple data include data selected from the group consisting of data for identifying the milking site, milk yield data, data to identify the individual herd members, data related to parity, reproduction state and lactation state of the herd members including data indicating points in time in the reproduction and lactation

10 cycles, data for time of sample collections, historical analytical data for the physiological and nutritional state, historical data for compositions of milk samples, feeding scheme data, disease record data including data for previous disease treatments.

81. A method according to claim 79 where the data storage means is, or is operationally

15 linked to, a data management system that is capable of comparing real time analytical data received from the signal detection means with data stored in the data storage means and, based thereupon, generating and transmitting an instruction message to the herd manager.

20 82. A method according to claim 49 or 81 using a system where the data storage means is operationally linked to a database comprising historical data descriptive of the physiological and nutritional condition collected from members of one or more different milk producing animal herds, said database either being part of the system or an being an external database operationally linked to the system.

25

83. A system according to claim 82 where the external database is operationally linked to the system via the internet.

84. A method according to claim 81 where the instruction message indicates that a specific

30 herd member is ready for insemination or becomes pregnant.

85. A method according to claim 81 where the instruction message indicates that a specific herd member is in need of mastitis treatment.

35 86. A method according to claim 81 where the instruction message indicates that at least one herd member is in need of a feeding scheme adjustment.

87. A method according to claim 81 where the recipient of the instruction message is a pre-selected specialist including a farmer, a veterinarian or a farm management consultant.

5 88. A method according to claim 49 using a system where the analysing means comprises means for performing an analysis selected from the group consisting of an enzymatically based assay, an immunologically based assay, a biosensor analysis, a biochemical assay, a spectrometric assay and a flow injection based assay.

10 89. A method according to claim 88 where the analysing means comprises solid support analytical devices.

90. A method according to claim 89 where the analysing means comprises or is operably linked to means for storing and transporting the solid support analytical devices.

15

91. An apparatus for analysing a plurality of compounds or parameters in a milk sample of an individual member of a milk producing animal herd, said apparatus comprising:

(i) separate means for analysing individual compounds or parameters in the milk
20   sample, each of said separate means is capable of generating a detectable signal in the presence of an individual sample compound or parameter,

(ii) means for directing a part of the milk sample to each separate analysing means, said directing means being controlled by means for storing data for the
25   physiological and nutritional state of each individual herd member, including data indicating point in time in the reproduction and lactation cycles of said herd member, such that the directing means is only activated at pre-selected points in time or at pre-selected time intervals in the production or lactation cycles of the individual herd member.

30
92. An apparatus according to claim 91 further comprising means for detecting signals generated in the presence of a compound or parameter being analysed,

93. An apparatus according to claim 91 or 92 provided with means for connecting it with at
35 least one of:

(a) means for collecting a milk sample from an individual member of said herd, said means is connectable to the herd milking system,

(b) means for recognising an identification code of the individual herd member,

(c) means for storing data including data for the physiological and nutritional state of said each individual herd member including data indicating point in time in the reproduction
5   and lactation cycles,

(d) means for converting the detected signals to a set of data that is indicative of the physiological and/or nutritional condition of said individual herd member,

10   (e) means for storage of said set of data descriptive of the physiological and/or nutritional condition for said individual herd members, and

(f) data output means.

1/5

Fig. 1
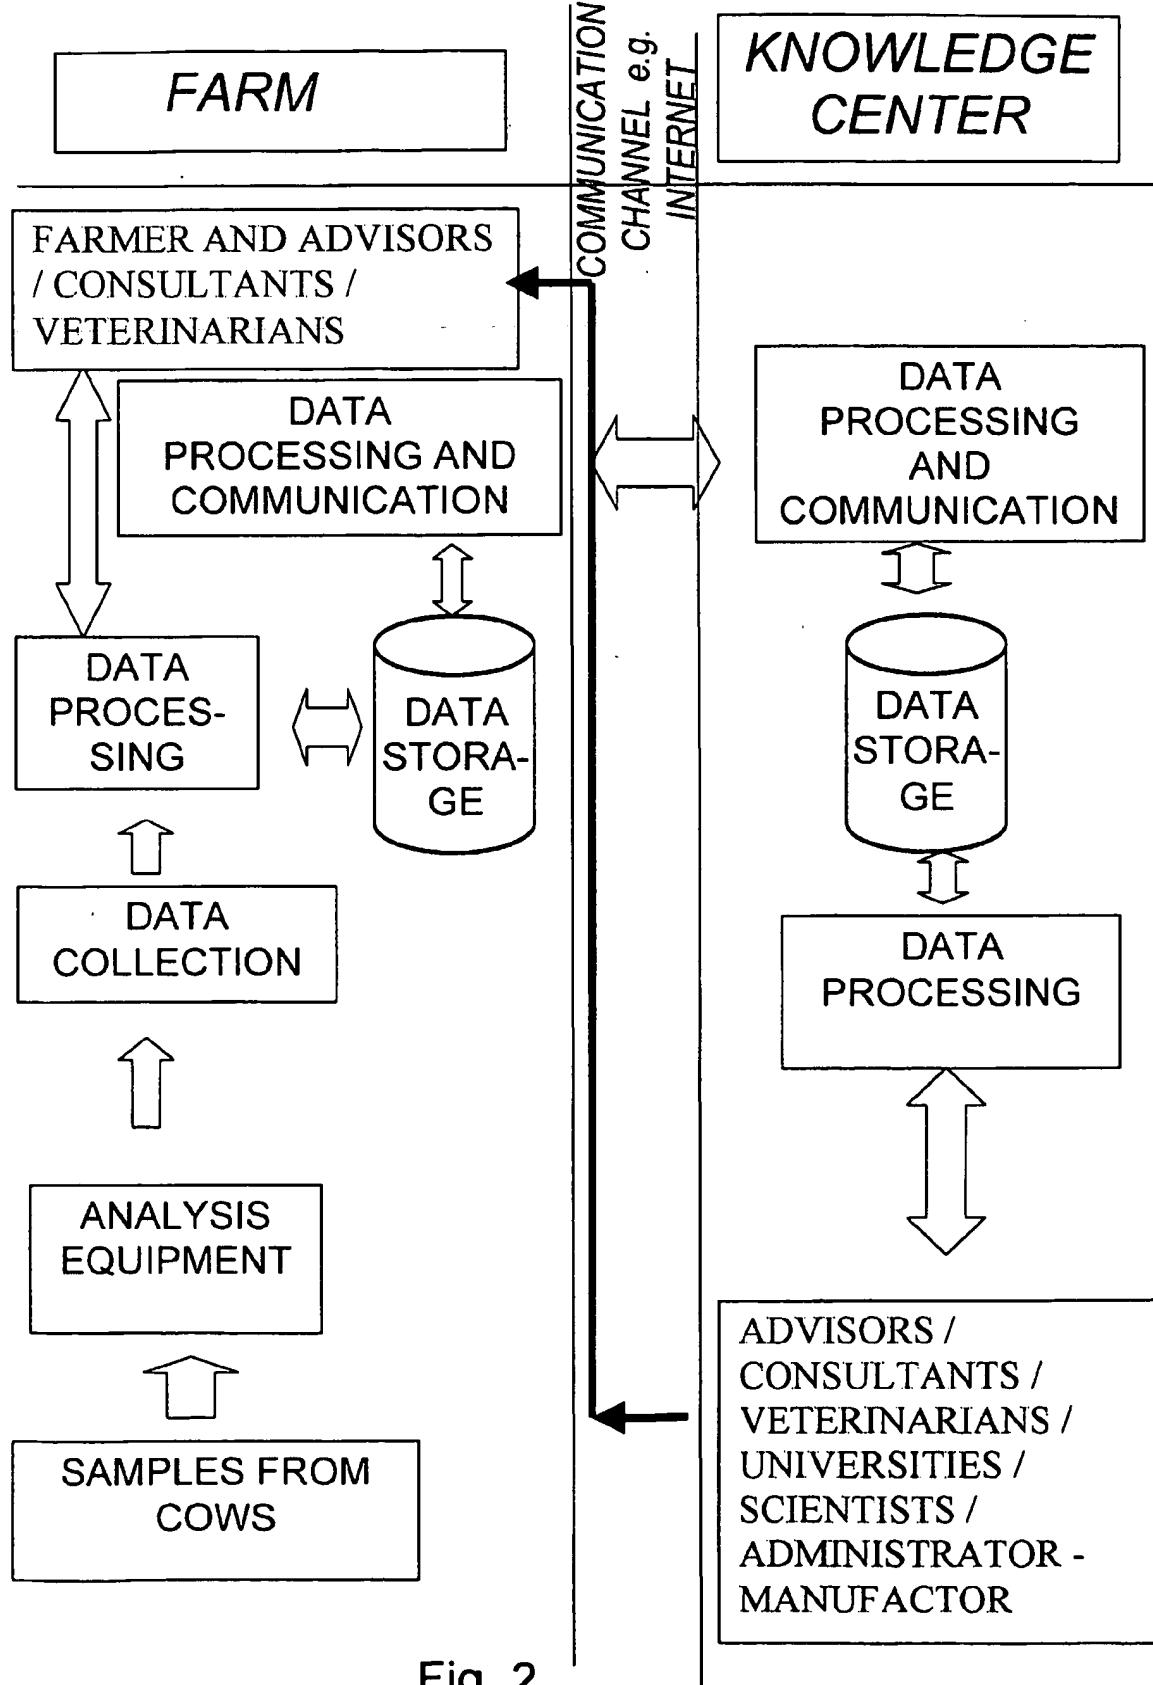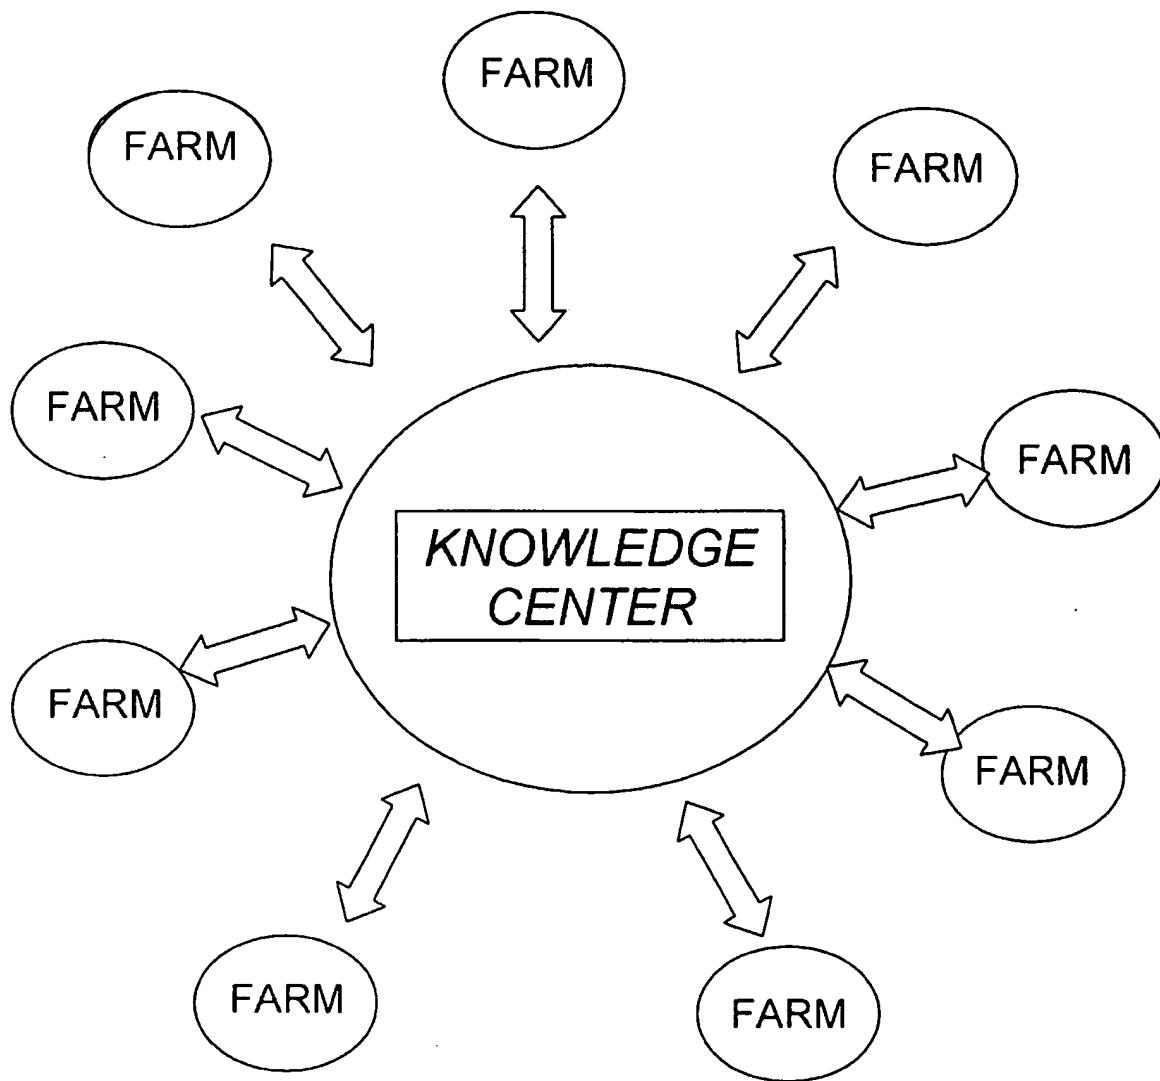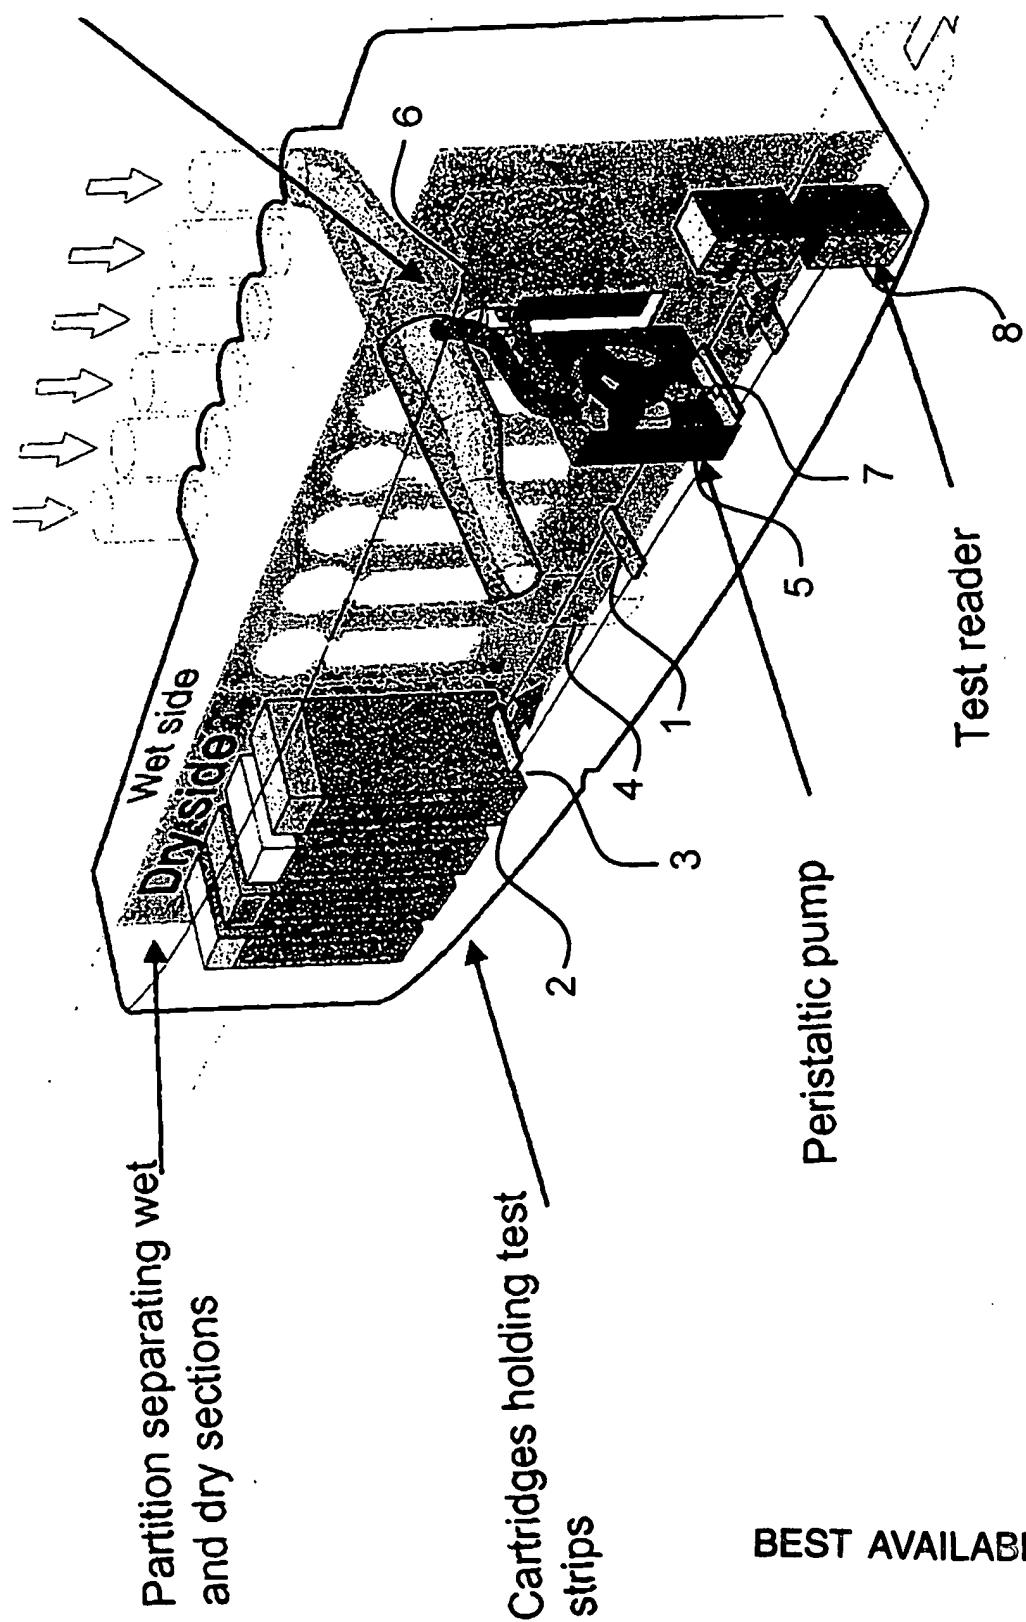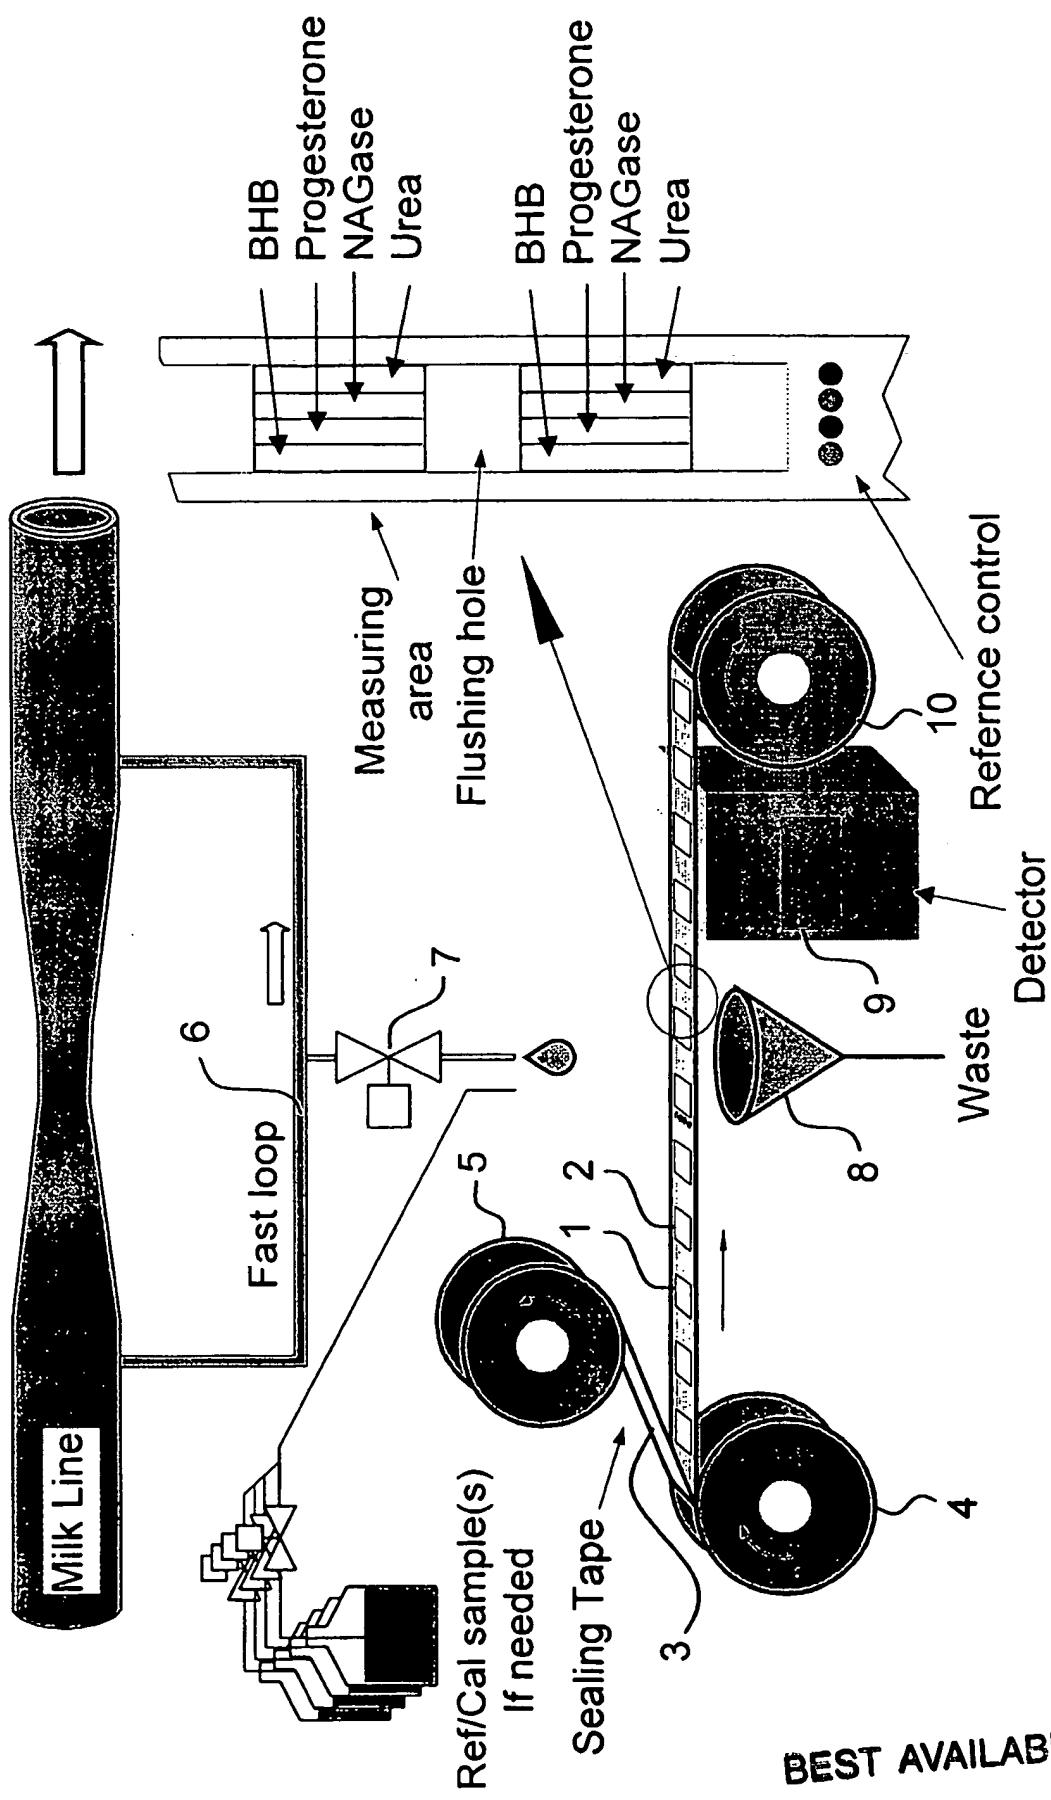
FARM

COMMUNICATION
CHANNEL e.g.
INTERNET

KNOWLEDGE
CENTER

FARMER AND ADVISORS / CONSULTANTS / VETERINARIANS

DATA PROCESSING AND COMMUNICATION

DATA PROCES-SING

DATA STORA-GE

DATA COLLECTION

ANALYSIS EQUIPMENT

SAMPLES FROM COWS

DATA PROCESSING AND COMMUNICATION

DATA STORA-GE

DATA PROCESSING

ADVISORS / CONSULTANTS / VETERINARIANS / UNIVERSITIES / SCIENTISTS / ADMINISTRATOR - MANUFACTOR

Fig. 2

Fig. 3

Partition separating wet and dry sections

Cartridges holding test strips

Wet side

Dry side

Peristaltic pump

Test reader

Fig. 4

Fig. 5

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   A01J5/01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7   A01J   A01K   G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, BIOSIS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 532 892 A (KUZARA JAMES H) 6 August 1985 (1985-08-06) column 2, line 62 -column 4, line 53 column 6, line 6 - line 16 column 10, line 25 -column 12, line 53; claims; figures	1,48,49, 91
A	WO 99 18774 A (POSTMA EBELE MARTEN ;ROOSENBOOM DERK JAN (NL); NEDAP NV (NL); VERS) 22 April 1999 (1999-04-22) page 1, line 15 -page 4, line 23; claims; figures	1,48,49, 91
A	US 5 743 209 A (BAZIN SERGE ET AL) 28 April 1998 (1998-04-28) cited in the application the whole document	1-93

-/--

| X | Further documents are listed in the continuation of box C. | X | Patent family members are listed in annex. |

° Special categories of cited documents :

'A' document defining the general state of the art which is not considered to be of particular relevance

'E' earlier document but published on or after the international filing date

'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

'O' document referring to an oral disclosure, use, exhibition or other means

'P' document published prior to the international filing date but later than the priority date claimed

'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

'&' document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
14 June 2002	25/06/2002

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Acerbis, G

Form PCT/ISA/210 (second sheet) (July 1992)

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 657 098 A (NEDAP NV) 14 June 1995 (1995-06-14) the whole document	1,48,49, 91

INTERNATIONAL SEARCH REPORT

Information on patent family members

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 4532892	A	06-08-1985	US	4463353 A	31-07-1984
WO 9918774	A	22-04-1999	NL	1007266 C2	14-04-1999
			NL	1007344 C2	27-04-1999
			AU	9652998 A	03-05-1999
			EP	1022937 A1	02-08-2000
			WO	9918774 A1	22-04-1999
			US	6378455 B1	30-04-2002
US 5743209	A	28-04-1998	AU	690312 B2	23-04-1998
			AU	3121295 A	04-03-1996
			CA	2172804 A1	15-02-1996
			DE	69522654 D1	18-10-2001
			EP	0721297 A1	17-07-1996
			WO	9603859 A1	15-02-1996
			NZ	290469 A	24-11-1997
EP 0657098	A	14-06-1995	NL	9302154 A	03-07-1995
			DE	69427015 D1	10-05-2001
			DE	69427015 T2	15-11-2001
			EP	0657098 A1	14-06-1995